




ISO BEARING-SINGAPORE (PTE)LTD.

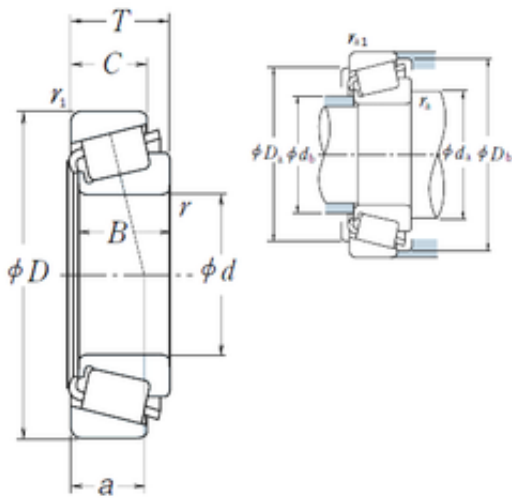

63,5 mm x 112,712 mm x 30,048 mm NSK
3982/3926 tapered roller bearings

Bearing No. 3982/3926

3982/3926 Bearing 2D drawings and 3D CAD models

Size	63.5x112.712x33.338 mm
Bore Diameter	63,5 mm
Outer Diameter	112,712 mm
Width	33,338 mm
d	63,5 mm
D	112,712 mm
T	33,338 mm
B	30,048 mm
C	26,988 mm
ra1 max.	3,3 mm
a	28,7 mm
r min.	3,5 mm
r1 min.	3,3 mm
Da	98 mm
db	71 mm
ra max.	3,5 mm
da	78 mm
Db	106 mm
Weight	1,33 Kg
Basic dynamic load rating (C)	120 kN
Basic static load rating (C0)	173 kN
(Grease) Lubrication Speed	3200 r/min
(Oil) Lubrication Speed	4300 r/min
Calculation factor (e)	0,4
Calculation factor (Y0)	0,82



ISO BEARING-SINGAPORE (PTE)LTD.

LangID	1
ALP23	0
outer r	3.3
ALP22	0
D_	112.712
ALP21	30
SHOG_yobi	3982R/3926R
RAr	199.9
inner r	3.5
GRS rpm	3200
D_b	106
D_a	98
DE_	97.733
SLR	21.2
Prod_Type3	TRBSR_ID_A
BETA_	1
ALPHA_	15
SDM_	87.847
DA1	11.046
DA2	9.879
hidYobi	3982/3926
Y1	1.5
B_	30.048
Oil rpm	4300
hidTable	ecat_NSTPRI
Y0	0.82
inner ra	3.5
outer rb	3.3
C0	173
CUP	0.541
e	0.4
DA_	10.465



ISO BEARING-SINGAPORE (PTE)LTD.

BET21	3
BET22	10
BET23	0
Z_	22
C_	26.988
yobi	3982/3926
KBRG	3161
CONE	0.789
DI_	77.587