




## ISO BEARING-SINGAPORE (PTE)LTD.

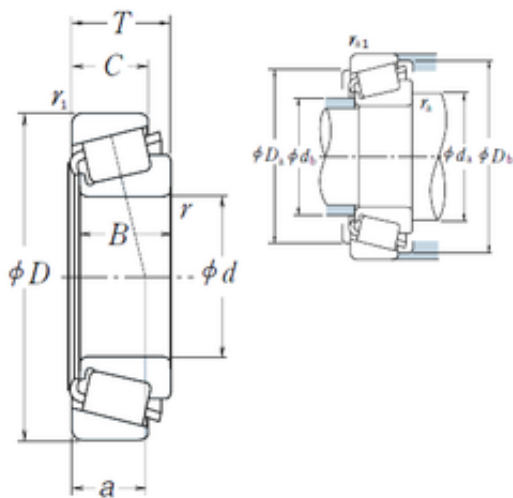

57,15 mm x 96,838 mm x 21,946 mm NSK  
387A/382A tapered roller bearings

Bearing No. 387A/382A

Size	57.15x96.838x21 mm
Bore Diameter	57,15 mm
Outer Diameter	96,838 mm
Width	21 mm
d	57,15 mm
D	96,838 mm
T	21 mm
B	21,946 mm
C	15,875 mm
ra1 max.	0,8 mm
a	17,6 mm
r min.	3,5 mm
r1 min.	0,8 mm
Da	89 mm
db	62 mm
ra max.	3,5 mm
da	69 mm
Db	92 mm
Weight	0,599 Kg
Basic dynamic load rating (C)	80,5 kN
Basic static load rating (C0)	100 kN
(Grease) Lubrication Speed	3600 r/min
(Oil) Lubrication Speed	5000 r/min
Calculation factor (e)	0,35
Calculation factor (Y0)	0,93

387A/382A Bearing 2D drawings and 3D CAD models



## ISO BEARING-SINGAPORE (PTE)LTD.

LangID	1
ALP23	0
outer r	0.8
ALP22	34
D_	96.838
ALP21	26
SHOG_yobi	387A/382A
RAr	195.758
inner r	3.5
GRS rpm	3600
D_b	92
D_a	89
DE_	86.801
SLR	14.35
Prod_Type3	TRBSR_ID_A
BETA_	1
ALPHA_	13.283
SDM_	76.475
DA1	10.533
DA2	9.765
hidYobi	387A/382A
Y1	1.7
B_	21.946
Oil rpm	5000
hidTable	ecat_NSTPRI
Y0	0.93
inner ra	3.5
outer rb	0.8
C0	100
CUP	0.179
e	0.35
DA_	10.3



## ISO BEARING-SINGAPORE (PTE)LTD.

BET21	3
BET22	5
BET23	0
Z_	19
C_	15.875
yobi	387A/382A
KBRG	3161
CONE	0.42
DI_	66.334