




ISO BEARING-SINGAPORE (PTE)LTD.

42,875 mm x 79,375 mm x 25,4 mm Timken
26886/26822 tapered roller bearings

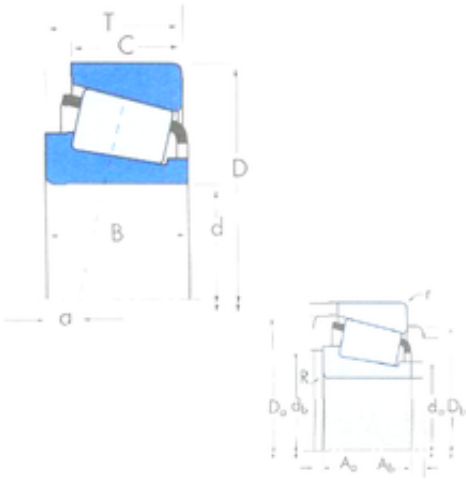

Bearing No. 26886/26822

26886/26822 Bearing 2D drawings and 3D CAD models

Size	42.875x79.375x23.812 mm
Bore Diameter	42,875 mm
Outer Diameter	79,375 mm
Width	23,812 mm
d	42,875 mm
D	79,375 mm
T	23,812 mm
B	25,4 mm
C	19,05 mm
R	1,5 mm
r	0,8 mm
a -	7,4 mm
Da	74 mm
db	51 mm
da	48,5 mm
Db	71 mm
Aa	1,4 mm
Ab	1,2 mm
Weight	0,51 Kg
Basic static load rating (C0)	110 kN
Factor (G1)	32,8
Factor (G2)	13,3
Factor (Cg)	0,0191
Factor (K)	1,83
Basic dynamic load rating (C90)	21,9



ISO BEARING-SINGAPORE (PTE)LTD.

Basic dynamic load rating (Ca90)	11,9
Basic dynamic load rating (C1)	84,3 kN
Calculation factor (e)	0,32